




LX-1700/2 AUDIO/VIDEO TRANSMITTER 1.7 GHz BAND



LX-1700/2

The new 1.7 GHz Audio/Video transmitter is a special design for Military applications capable to work in extremely low or high temperature range. This transmitter has 8 easy to change channels and 2 W RF power.

LX-1700/2 works from 10 V- 16 V.

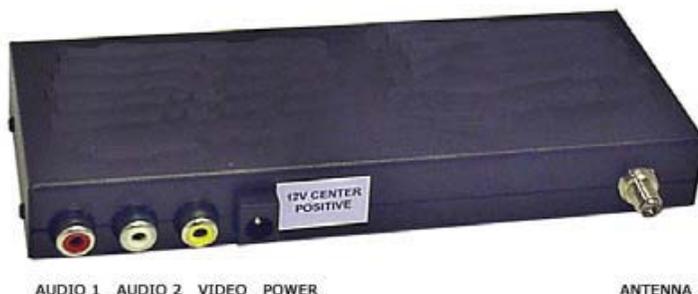

VRX-1700

This is the most sensitive and definitely the best 1.7 GHz Audio/ Video receiver on the market. Fully synthesized this receiver has an SMA connector for different type of antennas 1.7 GHz. It has 8 selectable channels. This receiver works with any TV system.

TRANSMITTER FEATURE:	RECEIVER FEATURE:
Operating Frequencies: 1700 MHz-1900 MHz	Operating Frequencies: 1700 MHz- 1900 MHz
Channel: Agile channels from 1-8	Channel: #1, 2, 3, 4, 5, 6, 7, 8
DC Voltage: 12 V – 14 V	DC Voltage: 10 V- 12 V
RF power: 2 W	RF power: N/A
Minimum required voltage: 10 V	Minimum required voltage: 9 V
Battery power: 12 V	Battery power: 12 V/ 300 mA
Video distortion: 3%	Video distortion: 3%
Maximum range: Long range, over 7 km LOS	Sensitivity: -89 dBm
Video Format: PAL, NTSC	Video Format: PAL, NTSC
Current Consumption: 1000 mA / 12 V	Current Consumption: 280 mA / 9 V
Antenna: N/A	Antenna: Recommended high gain, omni directional ant.
Antenna Connector: SMA	Antenna Connector: SMA
Impedance: 50 ohms	Impedance: 50 ohms
Audio input: 300 mV	Video output Connector: RCA F
Video/Audio Connectors: RCA F	Video Impedance: 75 ohms
Video Impedance: 75 ohms	Two Audio outputs: 300 mV per channel
Video level: 1 V	Carrier frequencies for audio channels: 6 MHz and 6.5 MHz
Temperature Range: -40 +78 °C	Temperature Range: -25 +65* C
Dimensions: 6" X 3 " X 1"	Dimensions: 2.5" X 5.7" X 0.8"
Weight: 350 grams	Weight: 200 grams
Modulation: WFM	Demodulation: WFM



AX-18R

OMNI DIRECTIONAL ANTENNA



MT-17

MOBIL-MOUNT OMNI ANTENNA



PT-1700

PANEL ANTENNA



LOG2/GR

LAN YAGI ANTENNA