




# MT-24P 2.4 GHz DUAL BAND 3 DB GAIN MOBILE OMNI-DIRECTIONAL ANTENNA




This very compact mobile-mount omni antenna provides broad coverage and 3 dBi gain. It is ideally suited for PCS applications where omni-directional coverage and low visibility are desired.

Technical Specifications	
Operating Frequency:	2400 MHz
Impedance:	50 ohms
Temperature Range:	-40 +85* C
Polarization:	Vertical
Mounting:	TDA / NMO
Max. input power:	50 watts
Length:	2.7" including base
VSWR:	< 2.0:1 avg.
Gain:	3 dBi
Wind survival	>150 MPH
RoHS	Yes

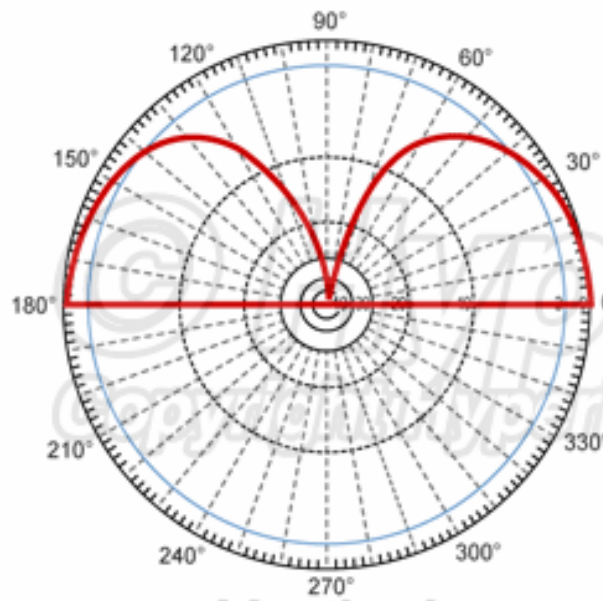

**Vertical**

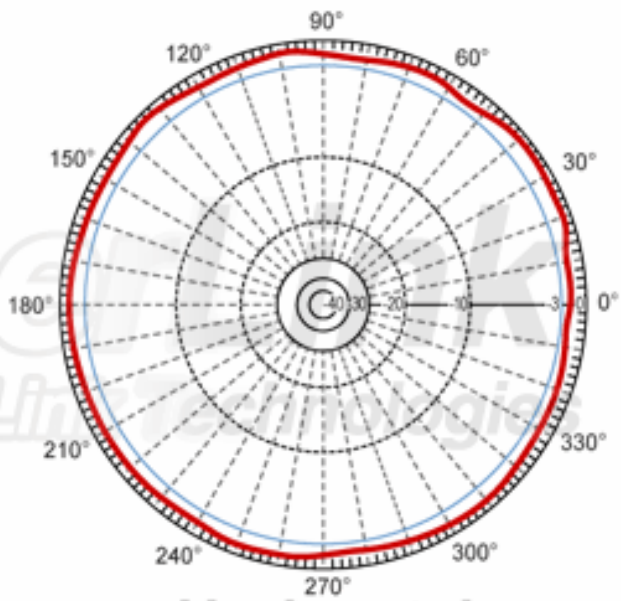

**Horizontal**

Copyright © 2001-2010 RF-LINKS