




CX-2500/2

TWO WAY ACTIVE ANTENNA SPLITTER

TWO-WAY active antenna splitter, 0 dB, is excellent for diversity antenna applications; Impedance 50 ohms, gain 8 dBi. DC power 12V/ 60 mA., **Frequency response 2300-2500 MHz.**

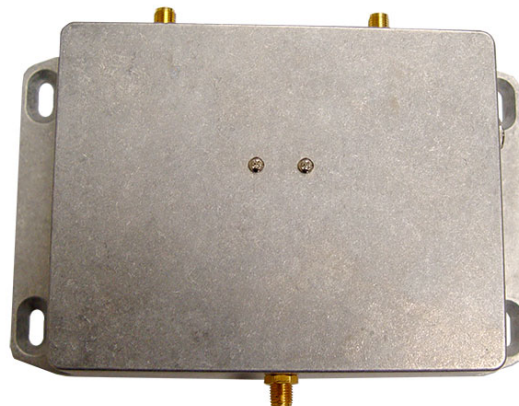

Technical Specifications	
Operating Frequencies:	2300 MHz-2500 MHz
Sensitivity:	-89 dBm
Number of inputs:	2
Insertion loss:	<1.5
Channel isolation:	>35 dB
Connectors:	SMA Female
Impedance:	50 ohms
Temperature Range:	-10 + 75 *C
Dimensions:	5.9" x 3.5" X 1.6"
DC supply voltage:	9 V-12.0 V max
Gain:	8 dB
Maximum input power:	0 dBm
Power Consumption:	9-12 V/ 60 mA