




# S-1700 HRP 1700 MHz FM COMPLETE RACING WIRELESS SYSTEM

1.7 GHz complete wireless TV system S-1700 is an excellent solution for car racing. It comes with a high power video transmitter 80 W, receiver VRX-1700, two dipole antennas. This system is excellent to send a broadcast quality video signal over 75 miles. The range in the open area is even greater. Transmitter and receiver have an LCD display to easy access any frequency in 1, 7 GHz- 1, 9 GHz band.

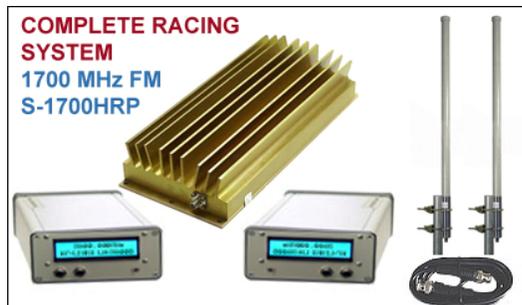

Receiver Technical Specifications	
Power supply:	DC 12 V
Sensitivity:	-89 dBm
Frequency range:	1700-1900 MHz
Channel selection:	By LCD display
Antenna connector:	N-F
Demodulation:	WFM
Audio outputs:	300 mV/10 Kohm
Video output:	1 V
Video impedance:	75 ohms
Current consumption: :	4500 mA

Transmitter Technical Specifications	
Power supply:	DC 12 V -14 VDC
RF power:	80 W (very high power, requires special wiring)
Frequency range:	1700-1900 MHz
Channel selection:	By LCD display
Antenna connector:	N-F
Modulation:	WFM
Audio input:	300 mV/10 Kohm
Video input:	1 V
Video impedance:	75 ohms
Video distortion:	2%
Preemphasis filter:	Built-in
Current consumption: :	12 A

**WARNING:**

**RESTRICTED SALES TO GOVERNMENT OR MIL. ORGANIZATIONS ONLY,  
PLEASE EMAIL FOR MORE INFO**