




# BPF-4786/100 BAND-PASS FILTER UHF 470 MHz - 860 MHz

This is a high quality band-pass TV UHF filter for 470 MHz to 860 MHz band. This filter is fully tunable and you can choose any TV channel from 14 to 69 NTSC or 21-61 PAL TV systems.

Dimensions: 6.0 "X 3.0 "X 1.0 "



Technical Specifications	
Operating Frequencies:	470 MHz – 860 MHz
Maximum Power:	100 W
Minimum Channel Spacing:	3 Channels
Insertion Loss:	<3 dB
Channel Isolation:	>30 dB
Connector:	BNC
Impedance:	50 ohms
Size:	6.0" X 3.0" X1.0"
Temperature Range:	-10 + 75°C
TV Channels:	14-69 NTSC, 21-61 PAL
Channel Bandwidth:	± 6 MHz

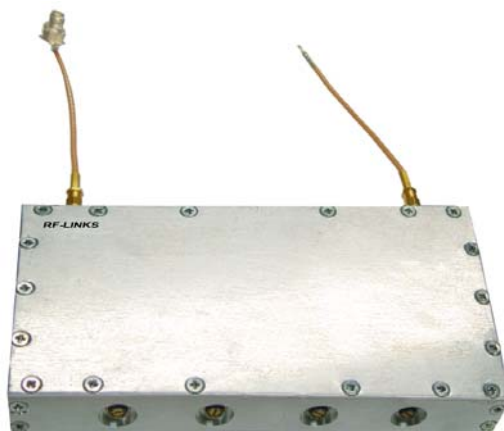

Copyright © 2001-2014 RF-LINKS